

Electrical stripper crimper

MC 25

Electrical stripping and crimping machine for insulated wire-end ferrules in strips



Technical specifications are subject to change according to possible needs and without notice.

FEATURES

- Stripping and crimping in one work step
- Easy to use and quiet operation
- High level of reliability
- The crimping dies can be easily and safely changed without tools
- Compact design suitable for mobile use
- Equipped with crimping tools with a cross-section of 0,5 - 2,5 mm²

Informative note: the optimal operation of the machine is only guaranteed with the use of the GLW ferrules

OPTIONS


- Tool kit to process 0,25 - 0,34 mm² conductors

TECHNICAL SPECIFICATIONS


	MC 25
Cross-section	0,5 - 2,5 mm ² (optional 0,25- 0,34 mm ²)
Insulated wire-end ferrule type	DIN 46 228 Part 4
Crimping shape	Trapezoidal
Pressing time	1,5 sec
Counter	Display LCD 6 cifre
Crimping length	8 mm
Power supply	100/115 VAC - 230/240 VAC 50/60 Hz
Dimensions & Weight	165 x 270 x 320 mm / 12 kg

CE Conformity: MC 25 is fully compliant with CE regulations and EMC equipment guidelines for mechanical, electrical and electromagnetic compatibility.

Note: we recommend to send samples with the application requirements for a preliminary examination.

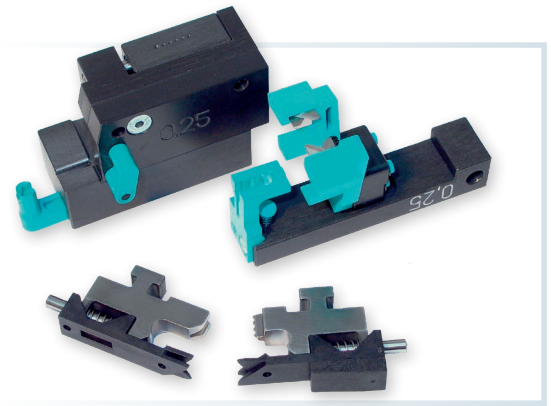

Tool set 0,25 - 0,34 mm²

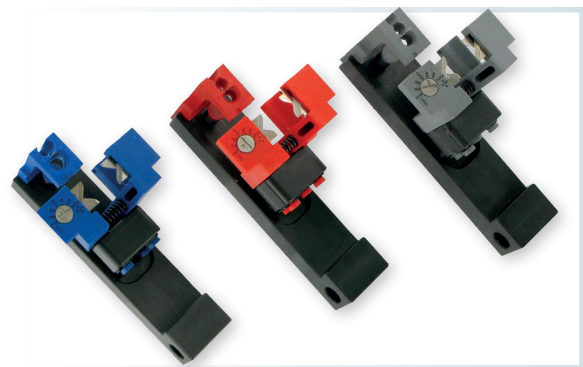

Stripping tools



Tool case